
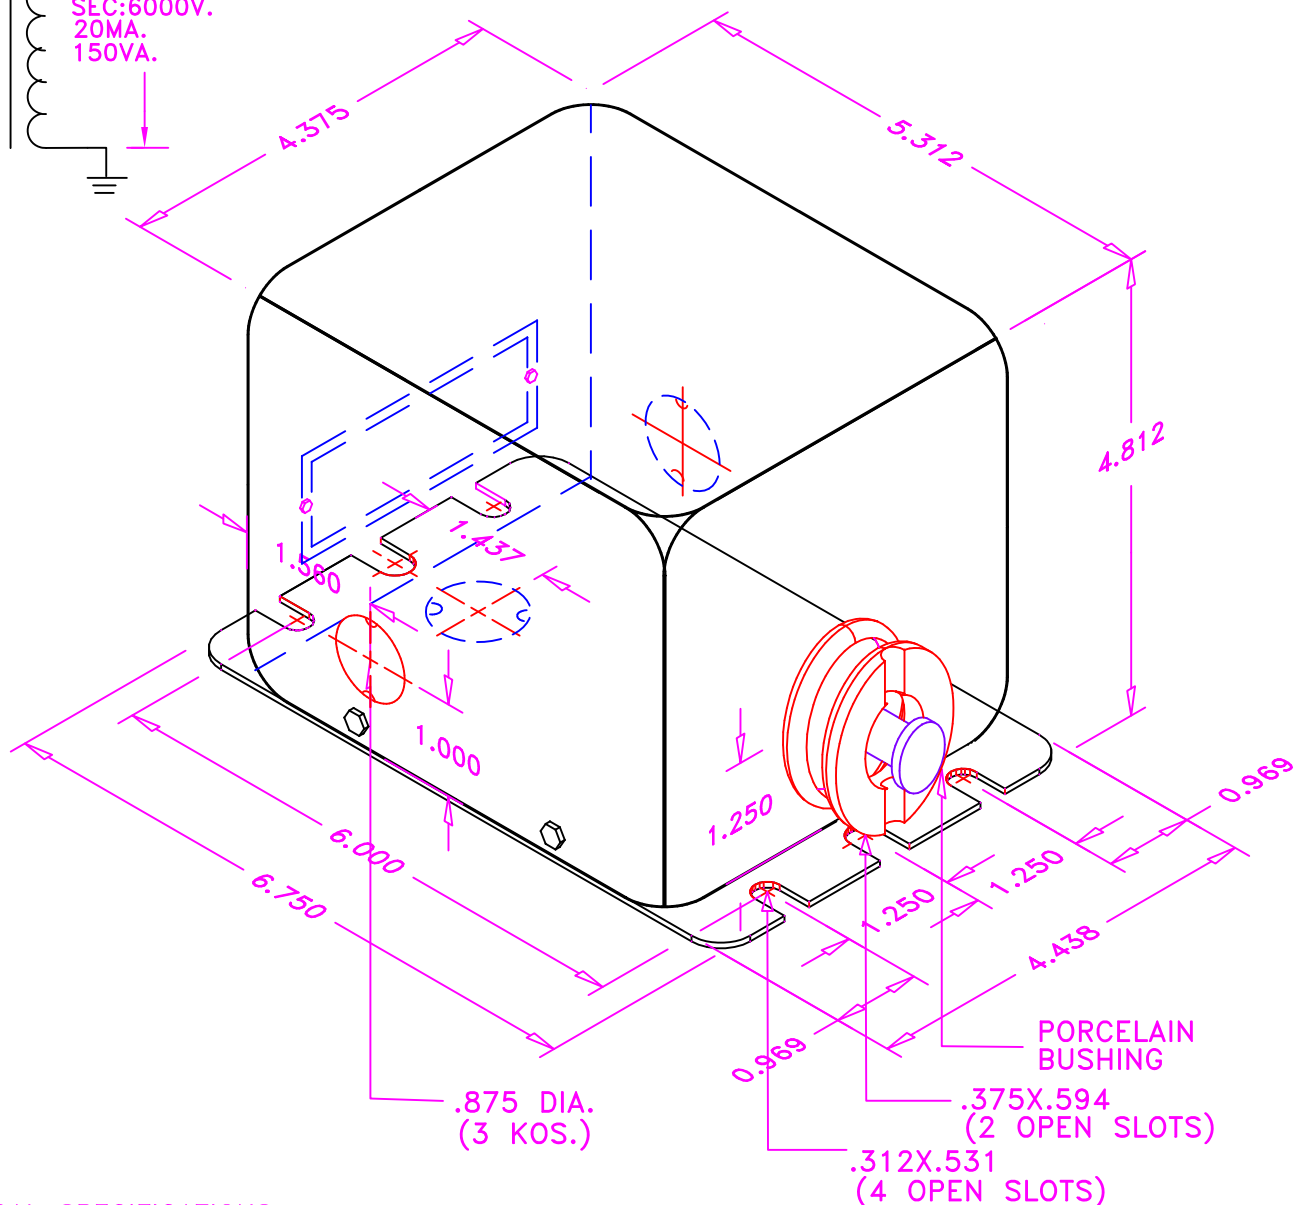


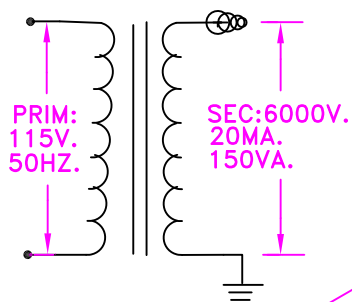

ELECTRICAL SPECIFICATIONS

STYLE: ENCLOSED, AIR COOLED, DRY TYPE, EPOXY ENCAPSULATED, IGNITION TRANSFORMER
PRIMARY: 115V. 50HZ.

SECONDARY: 6000V. AT 20 MA. (CONTINUOUS)

NOTE: START END OF SECONDARY GROUNDED TO CORE AND CASE.

INSULATION CLASS: 180°C MINIMUM

TEMPERATURE RISE: 55°C MAXIMUM

RATING: 150 VA.

MAXIMUM SECONDARY CURRENT: 24 MA. (SHORT CIRCUIT CURRENT)

MAXIMUM AMBIENT TEMPERATURE: 170°F (80°C)

TERMINATIONS: PRIM. LEAD WIRE 150°C, BLACK, 10" LONG

WEIGHT: APPROX. 11 LBS.

APPROVAL: UL. LISTED FILE #E12339

CE. DOCUMENT #61558-2-3

REF: B-273, IE-384

REV: C

TITLE: OUTLINE FOR 150 VA. 1PH. 50HZ.

REV: B

ENCAPSULATED IGNITION TRANSFORMER

REV: A

DONGAN ELECTRIC
MFG. CO.

PIONEER TRANSFORMER CO.

TOLERANCES
DECIMAL DIMENSIONS $\pm .030$
FRACTIONAL DIMENSIONS $\pm 1/32$

SCALE:
3D

MADE BY

M.JAFRI

DATE

2-2-01

CHECKED & APPROVED

PART NUMBER

E06-SA6XE

DRAWING NUMBER

10-803